

WHICH TABLE IS RIGHT FOR YOU?

Surgical C-Arm Table - 840

Three-axis motorized positioning
plus X-Y free-float



Accommodates
BARIATRIC
Patients

SPECIFICATIONS:

Dimensions: 104" l x 26" w (260 x 66 cm) with OR accessory rails
Tabletop: 101" l x 24" w (252 x 61 cm)
Catheter Tray Extension (removable): 18" l x 24" w (45.7 x 61 cm) non-radiolucent
Radiolucent Area:
51" l x 24" w (128 x 61 cm) unobstructed head to accessory rail
20" l x 17.5" w (50.8 x 44 cm) additional, between accessory rails
Radiolucent Area, Total Length: 71" l (178 cm)
Tabletop Material: Carbon fiber with integral head section
Mattress: 2" thick (5 cm)
Attenuation:
Tabletop: .7 mm Aluminum equivalence
Mattress: .5 mm Aluminum equivalence

Motions:

Height Adjustable: 33.5" to 43.5" (84 to 109 cm)
Tabletop X Motion (head-to-toe float): 20" (51 cm)
Tabletop Y Motion (side-to-side float): 10" (25.4 cm)
Trendelenburg: 0° to 20°
Reverse Trendelenburg: 0° to 20°
Lateral Roll: 0° to 20°

Controls:

Hand Control: height, lateral roll and Trendelenburg motions
Foot Control: activates all motions (has release for float)
Main Control Panel: LCD screen displays actual tabletop position (all axes) in real time, and provides menus and prompts for other functions
Push Button: releases X-Y Tabletop motions

Wheels:

Head End - 3" (7.62 cm) swivel casters, integral locking system on base
Foot End - 5" (12.7 cm) swivel casters with central locking
Accessory Rails: Standard OR accessory rails 49.5" x 1.12" x .375" (124 x 2.86 x .95 cm) mounted near foot end of table
Patient Restraints: Three body straps
Finish: Powder coat
Patient Capacity: 500 lb (227 kg); weight tested to four times the patient load rating.
Lift Capacity: May vary between 460 lb - 500 lb (209 - 227 kg) based on line voltage
Power: 115 VAC or 230 VAC and Battery. Battery automatically charges when table is plugged in. An additional battery can be charged with optional wall-mounted charger.
Standard Accessory:
- Catheter Tray Extension (removable)
- Bellows Skirt (disposable, 250/roll) and dispenser
Warranty: one year
Certifications: ETL and cETL Listed to UL-2601-1*, CAN/CSA° C22.2 No.: 601-1-M90, EN 60601-1 and IEC 60601-1-2:2001-09

058-840 Table, Surgical C-Arm - 840, 115 VAC

058-845 Table, Surgical C-Arm - 840, 230 VAC

Optional:

056-862 Battery and Charging Unit, 115 VAC
056-863 Battery and Charging Unit, 230 VAC
056-850 IV Pole, Rail Mounted
056-865 Arm Board, Carbon Fiber, one arm
056-866 Arm Board, Carbon Fiber, two arms
058-864 Arm Board, Surgical, Carbon Fiber

Pain Management C-Arm Table - 870

Ideal for pain care applications



Accommodates
BARIATRIC
Patients

SPECIFICATIONS:

Dimensions: 93" l x 26" w (233 x 66 cm) with OR accessory rails
Tabletop: 90" l x 24" w (228.6 x 61 cm)
Radiolucent Area:
60" l x 24" w (152.4 x 61 cm) unobstructed head to accessory rail
4" l x 17.5" w (10.1 x 44 cm) additional, between accessory rails
Radiolucent Area, Total Length: 64" l (160 cm)
Tabletop Material: Carbon fiber with integral head section
Mattress: 2" thick (5 cm)
Attenuation:
Tabletop: .7 mm Aluminum equivalence
Mattress: .5 mm Aluminum equivalence

Motions:

Height Adjustable: 30" to 40" (75 to 100 cm)
Trendelenburg: 0° to 20°
Reverse Trendelenburg: 0° to 20°
Lateral Roll: 0° to 20°

Controls:

Hand Control: activates height, lateral roll and Trendelenburg motions
Optional:
Foot Control: activates height, lateral roll and Trendelenburg motions

Wheels:

Head End - 3" (7.62 cm) swivel casters, integral locking system on base
Foot End - 5" (12.7 cm) swivel casters with central locking
Accessory Rails: Standard OR accessory rails 30" x 1.12" x .375" (75 x 2.86 x .95 cm) mounted near foot end of table
Patient Restraints: Three body straps
Finish: Powder coat
Patient Capacity: 500 lb (227 kg); weight tested to four times the patient load rating.
Lift Capacity: May vary between 460 lb - 500 lb (209 - 227 kg) based on line voltage
Power: 115 VAC or 230 VAC
Warranty: one year
Certifications: ETL and cETL Listed to UL-2601-1*, CAN/CSA° C22.2 No.: 601-1-M90, EN 60601-1 and IEC 60601-1-2

058-870 Table, Pain Management C-Arm - 870, 115 VAC


058-875 Table, Pain Management C-Arm - 870, 230 VAC

Optional:

058-877 Controller, Foot
056-850 IV Pole, Rail Mounted
056-865 Arm Board, Carbon Fiber, one arm
056-866 Arm Board, Carbon Fiber, two arms
058-864 Arm Board, Surgical, Carbon Fiber

Surgical C-Arm Table - 846

Affordably priced float-top table

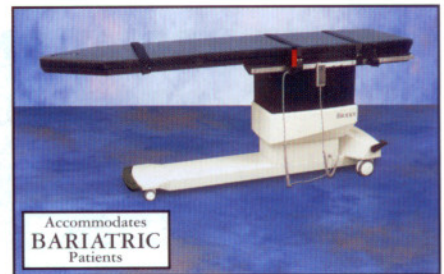

Accommodates
BARIATRIC
Patients

SPECIFICATIONS:

Dimensions: 104" l x 26" w (260 x 66 cm) with OR accessory rails
Tabletop: 101" l x 24" w (252 x 61 cm)
Radiolucent Area:
51" l x 24" w (128 x 61 cm) unobstructed head to accessory rail
20" l x 17.5" w (50.8 x 44 cm) additional, between accessory rails
Radiolucent Area, Total Length: 71" l (178 cm)
Tabletop Material: Carbon Fiber with integral head section
Mattress: 2" thick (5 cm)
Attenuation:
Tabletop: .7 mm Aluminum equivalence
Mattress: .5 mm Aluminum equivalence

Motions:

Height: Adjustable from 33.5" to 43.5" (84 to 109 cm)
Tabletop X Motion (head-to-toe float): 20" (51 cm)
Tabletop Y Motion (side-to-side float): 10" (25.4 cm)

Controls:

Hand Control: height
Push Button: releases X-Y Tabletop motions

Wheels:

Head End - 3" (7.62 cm) swivel casters, integral locking system on base
Foot End - 5" (12.7 cm) swivel casters with central locking
Accessory Rails: Standard OR accessory rails 49.5" x 1.12" x .375" (124 x 2.86 x .95 cm) mounted near foot end of table
Patient Restraints: Three body straps
Patient Capacity: 500 lb (227 kg); weight tested to four times the patient load rating.
Lift Capacity: May vary between 460 lb - 500 lb (209 - 227 kg) based on line voltage
Power: 115 VAC or 230 VAC
Warranty: one year
Certifications: ETL and cETL Listed to UL-2601-1*, CAN/CSA° C22.2 No.: 601-1-M90 and EN 60601-1

058-846 Table, Surgical C-Arm - 846, 115 VAC

058-847 Table, Surgical C-Arm - 846, 230 VAC

Optional:

058-848 Catheter Tray Extension (removable)
056-850 IV Pole, Rail Mounted
056-865 Arm Board, Carbon Fiber, one arm
056-866 Arm Board, Carbon Fiber, two arms
058-864 Arm Board, Surgical, Carbon Fiber

WHICH TABLE IS RIGHT FOR YOU?

Urology C-Arm Table - 800

Configure to your exact specifications



SPECIFICATIONS:

Dimensions: 84.5" l x 25.5" w (214.6 x 64.8 cm) with OR accessory rails
 Tabletop: 53" l x 21" w (134.6 x 53.3 cm); 84" l (213.4 cm) with extension
 Lightweight Extension (for patient transfer only, not for imaging): 26.5" l x 21" w (67.3 x 53.3 cm)
 Radiolucent Extension: 31" l x 25.5" w (78.7 x 64.8 cm) with OR accessory rails
 Radiolucent Area: 54" l x 17.5" w (137.2 x 44.5 cm)
 Tabletop Material: Three Fibersin™ sections – each with individual 2" mattress
 Table Sections: Four Sections: Adjustable Fowler back 0° to 80°; abdominal section with cutout; radiolucent removable extension and a lightweight non-imaging transfer extension for transferring patients on/off the table
 Mattress: Individual 2" thick (5 cm), one for each section

Motions:

Height Adjustable: 34" to 43.5" (86.4 to 110.5 cm)
 Tabletop X Motion (head-to-toe): 20" (51 cm)
 Tabletop Y Motion (side-to-side): 10" (25.4 cm)
 Trendelenburg: 0° to 20°
 Reverse Trendelenburg: 0° to 20°
 Lateral Roll: 0° to 20°
 Fowler Back: Adjusts from 0° to 80° with touch handle lock/unlock

Controls:

Hand Control: activates all motions
 Foot Control: activates all motions
 Main Control Panel: LCD screen displays actual tabletop position (all axes) in real time, and provides menus and prompts for other functions
 Joystick Controller: for motorized X-Y positioning

Optional:

X-Ray Film Tray: Removable film cassette tray for 14" x 17" film with cassette mask for 10" x 12" film. Film cassette tray can be removed from either side of the table.
 X-Ray Grid: Removable X-Ray grid, 103 line, 8:1 ratio

Wheels:

Foot End – 3" (7.62 cm) locking swivel casters
 Head End – 5" (12.7 cm) swivel casters with central locking

Accessory Rails: Standard OR accessory rails 1.125" x .375" (2.86 x .95 cm) on table (rails also on table imaging extension)

Patient Restraints: Two body straps, two ankle straps

Finish: Powder coat

Patient Capacity: 400 lb (181.4 kg); weight tested to four times the patient load rating.

Power: 115 VAC or 230 VAC and Battery. Battery automatically charges when table is plugged in. An additional battery can be charged with optional wall-mounted charger.

Warranty: One year

Certifications: UL-2601-1*, CAN/CSA® C22.2 No.: 601-1-M90, EN 60601-1, IEC 60601-1-2:2001-09

058-800 Table, Urology C-Arm, 115 VAC

058-805 Table, Urology C-Arm, 230 VAC

Optional:

056-851 Drain Bag Frame

058-860 Drain Pain, Stainless Steel

056-853 Crutch, Knee, Simplicity, (pair)

058-862 Leg Holder, PAL with boot pad (pair)

058-865 Arm Board, Standard (pair)

058-863 Arm Board, Dura Board with pad (pair)

056-850 IV Pole, rail mounted

056-862 Battery and Wall Charging Unit, 115 VAC

056-863 Battery and Wall Charging Unit, 230 VAC

056-463 Grid, X-ray, 103-line 8:1 ratio, 18" x 18"

058-866 Cassette Tray Holder, 11" x 14"

058-867 Extension Arm Controller

Replacement:

056-857 Drain Bags, Sterile, Disposable, 10/pkg

Fits 056-851 Drain Bag Frame

056-460 Hose, Drain, Urology, 40/cs

056-802 Bellows Skirt, disposable plastic, 250/roll

Fits Surgical C-Arm Tables, 840, Urology C-Arm Table and Brachytherapy Table

Brachytherapy C-Arm Table - 810

Fully image-guided ion implantation



SPECIFICATIONS:

Dimensions: 84.5" l x 25.5" w (214.6 x 64.8 cm) with OR accessory rails
 Tabletop: 53" l x 21" w (134.6 x 53.3 cm); 84" l (213.4 cm) with extension
 Lightweight Extension (For patient transfer only, not for imaging): 26.5" l x 21" w (67.3 x 53.3 cm)
 Radiolucent Extension: 31" l x 25.5" w (78.7 x 64.8 cm) with OR accessory rails
 Radiolucent Area: 54" l x 17.5" w (137.2 x 44.5 cm)
 Tabletop Material: Three Fibersin™ sections – each with individual 2" mattress
 Table Sections: Four Sections: Adjustable Fowler back 0° to 80°; abdominal section with cutout; radiolucent removable extension and a lightweight non-imaging transfer extension for transferring patients on/off the table
 Mattress: Individual 2" thick (5 cm), one for each section

Motions:

Height Adjustable: 34" to 43.5" (86.4 to 110.5 cm)
 Tabletop X Motion (head-to-toe): 20" (51 cm)
 Tabletop Y Motion (side-to-side): 10" (25.4 cm)
 Trendelenburg: 0° to 20°
 Reverse Trendelenburg: 0° to 20°
 Lateral Roll: 0° to 20°
 Fowler Back: Adjusts from 0° to 80° with touch handle lock/unlock

Controls:

Hand Control: activates all motions
 Foot Control: activates all motions
 Main Control Panel: LCD screen displays actual tabletop position (all axes) in real time, and provides menus and prompts for other functions
 Joystick Controller: for motorized X-Y positioning

Optional:

X-Ray Film Tray: Removable film cassette tray for 14" x 17" film with cassette mask for 10" x 12" film. Film cassette tray can be removed from either side of the table.
 X-Ray Grid: Removable X-Ray grid, 103 line, 8:1 ratio

Wheels:

Foot End – 3" (7.62 cm) locking swivel casters
 Head End – 5" (12.7 cm) swivel casters with central locking

Accessory Rails: Standard OR accessory rails 1.125" x .375" (2.86 x .95 cm) on table (rails also on table imaging extension)

Patient Restraints: Two body straps, two ankle straps

Finish: Powder coat

Patient Capacity: 400 lb (181.4 kg); weight tested to four times the patient load rating.

Power: 115 VAC or 230 VAC and Battery. Battery automatically charges when table is plugged in. An additional battery can be charged with optional wall-mounted charger.

Warranty: One year

Certifications: UL-2601-1*, CAN/CSA® C22.2 No.: 601-1-M90, EN 60601-1, IEC 60601-1-2:2001-09

058-810 Table, Brachytherapy, 115 VAC

058-815 Table, Brachytherapy, 230 VAC

Optional:

056-853 Crutch, Knee, Simplicity, (pair)

058-862 Leg Holder, PAL with boot pad (pair)

058-865 Arm Board, Standard (pair)

058-863 Arm Board, Dura Board with pad (pair)

056-850 IV Pole, rail mounted

056-862 Battery and Wall Charging Unit, 115 VAC

056-863 Battery and Wall Charging Unit, 230 VAC

058-867 Extension Arm Controller

Replacement:

056-802 Bellows Skirt, disposable plastic, 250/roll

Fits Surgical C-Arm Tables, 840, Urology C-Arm Table and Brachytherapy Table